


WIRING DIAGRAM

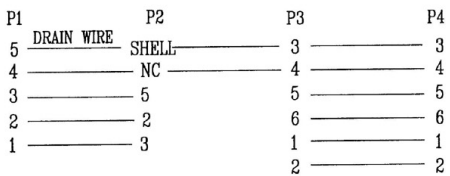

12	CORE	1	PCS	RH 12(OD)*5.6(ID)*L20MM
11	TUBE	1	PCS	TUBE $\phi 4.0 \times L10MM$
10	TUBE	1	PCS	TUBE $\phi 1.0 \times L37MM$
9	CONN.	1	PCS	MINI DIN 6PIN FEMALE
8	CONN.	1	PCS	MINI DIN 6PIN MALE
7	Screw	2	PCS	#4-40 BEIGE
6	CONN.	1	PCS	D-SUB 9PIN FEMALE
5	TERMINAL	5	PCS	JS-1124-T
4	HOUSING	1	PCS	H.S 1*5PIN PITCH.2.0 BEIGE (JS-1124-05)
3	CABLE	160	MM	NO UL 28AWG*6C+AL/MY OD: $\phi 4.0 \pm 0.15MM$ COLOR:BEIGE
2	CABLE	1220	MM	NO UL 24AWG*2C+AL/MY OD: $\phi 4.0 \pm 0.15MM$ COLOR:BEIGE
1	CABLE	1830	MM	NO UL 24AWG*4C+EA OD: $\phi 4.0 \pm 0.15MM$ COLOR:BEIGE
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION