


How to program "Marquee Lighting" in SP60

1. Before signal wires are connected, to select "Mode" first, then, select "Speed", "Delay", and "Save" to each lamp with an IR remote controller

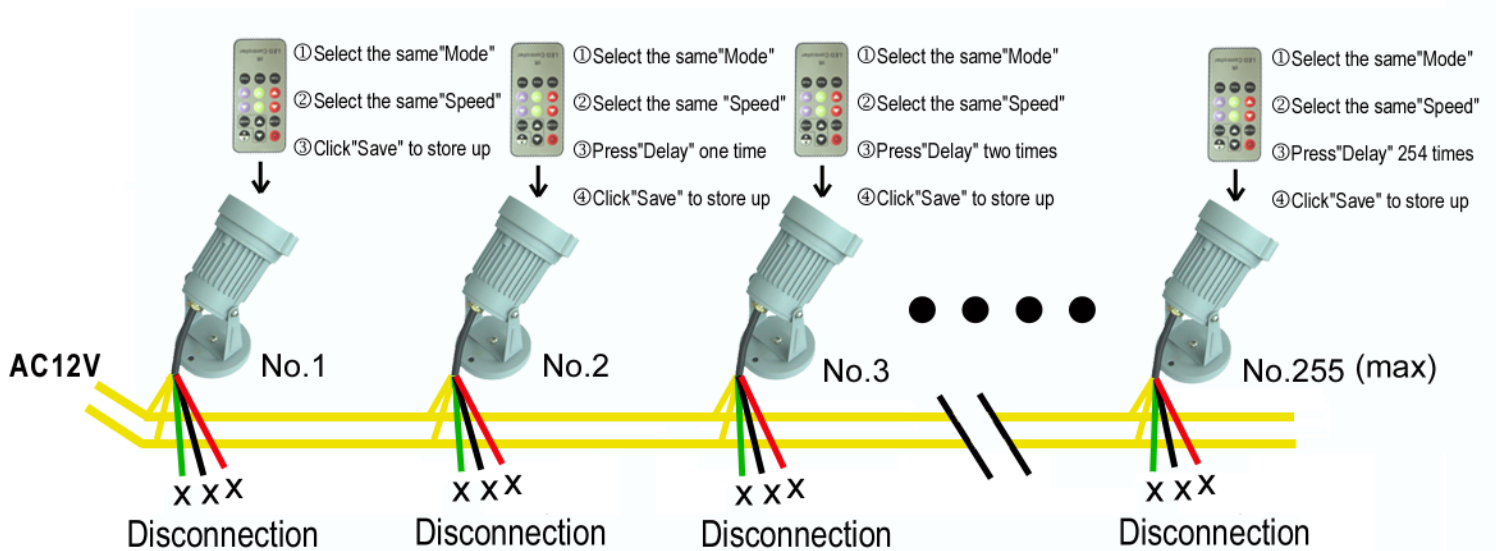

2. In accordance with "Instruction for SP60 RGB Spot Light" to connect the signal wires properly
3. After signal wires are all connected, choose your favorite modes (smooth flow, strobe, or fading), and speed. Save up your programming, and it will create diverse patterns of Marquee Lighting with different speed.

(Special attention!!)

- ① All SP60 will go slow one scale when they all connected to each other, if you press "Delay" button. All lamps go sync when the "Clear Delay" button is clicked. You can make different mode patterns as well as speed. Please **DON'T** press "Save" in this period of time. It will erase the Marquee Lighting effects. (If "Save" is pressed, please re-program according back to 1.) Simply, to click "Power" button 2 times to restore the "Marquee Lighting" effects.
- ② Please choose the transformers, which's power is equivalent to the quantity of SP60.